



NBK Series, Drop-In Induction Range with Separately Mounted Controls



Model	NBK118-A (C)	NBK26-A	NBK35-A
Power	Max 1800 W	Max 2600 W	Max 3500 W
Voltage	120 Volt, 1ph 50/60 Hz	208/240 Volt 1ph 50/60 Hz	
Max Amps	15	12.5	17
Connection	5' cord, NEMA 5-15P (5-20P)	5' Cord, NEMA 6-20P	
Package/Product Weight	17/15 lbs.		
Package/Product Dimensions	20" X 14" X 6 1/2" / 14 9/16" X 11 5/8" X 3 1/8"		
Warranty	1 Year		

Features

- Simple, clean design
- Easy to operate
- 10 Power settings (1-10)
- 7 Warming/Holding settings (H1-H7)
- Timer Settings up to 12 hours
- Patented Aerogel Insulation Protection
- Rugged steel case design
- Energy efficiency of about 90% or greater
- Large LED Display
- Displays diagnostic/error codes
- Automatic Fast Pan Sensing
- Robust heavy duty ceramic surface by NEG
- Automatic over temp-shut off
- Patented Ambient Controls Temperature Correction Technology

Accessories


- Stainless Steel Trim Ring
Simplifies installation and helps protect ceramic glass from side impact breakage.



Item # _____


Quantity _____

NBK Series Drop-In Induction Range with Integrated Touch Controls

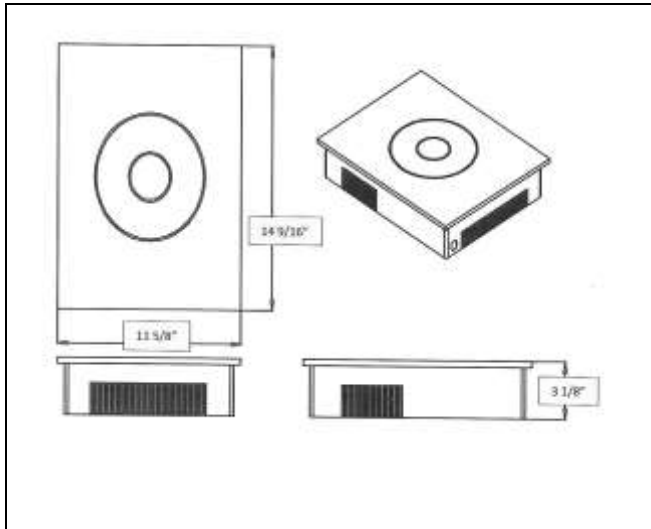

NBK product dimensions shown.
 Size countertop cutout to allow for sealing with a bead of silicone caulking.

A: 11 5/8" X 14 9/16" **C:** 3/16"
B: 3/8" **D:** 3 1/8"

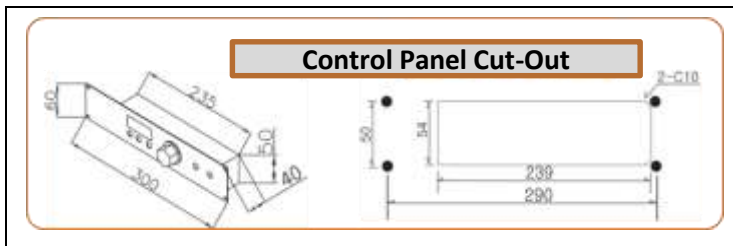

For installation with the optional Stainless Steel Trim Ring, cut out size is: 12" X 14 7/8"

Induction compatible cookware required, with a minimum bottom diameter of 5".

Maximum pot weight supported: 65 lbs.

Warming/holding temperature range approximately 95°F – 195°F.

Provide 4" clearance from vents for adequate airflow

Approximate Time To Boil Water

(Actual time depends on water starting temperature and type of pan/pot)

Water Volume (quarts)	4	8	12	16
Approx. Time to Boil NBK118-A	13 min	25 min	38 min	50 min
Approx. Time to Boil NBK26-A	9 min	17 min	26 min	35 min
Approx. Time to Boil NBK35-A	6 min	13 min	19 min	26 min

